




Connect Grizzl-E Smart to ChargeLab

Note: Ensure Firmware Version 5.53 or later is installed on Grizzl-E Smart before connecting to ChargeLab.




1. Plug in the Charger. Ensure indicator light is alternating Blue and Purple. Ensure the unit is disconnected from the network.
2. Open the Wi-Fi settings on your smartphone or desktop.
3. Select the network **UC_Smart_ [ChargerSerial#]**. Find the Charger Serial Number on the white label on the side of the Grizzl-E Smart.

4. Open the browser on your phone or desktop.
5. Enter the IP address 192.168.4.1 into the browser search bar. A webpage will load.
6. Select the **Show Available Networks** button.
7. Find your Wi-Fi Network on the list of available networks. Ensure you can see the network and that Rssi is between -50 and -79.
8. Select the Wi-Fi network from the list of available networks. This should highlight the network.

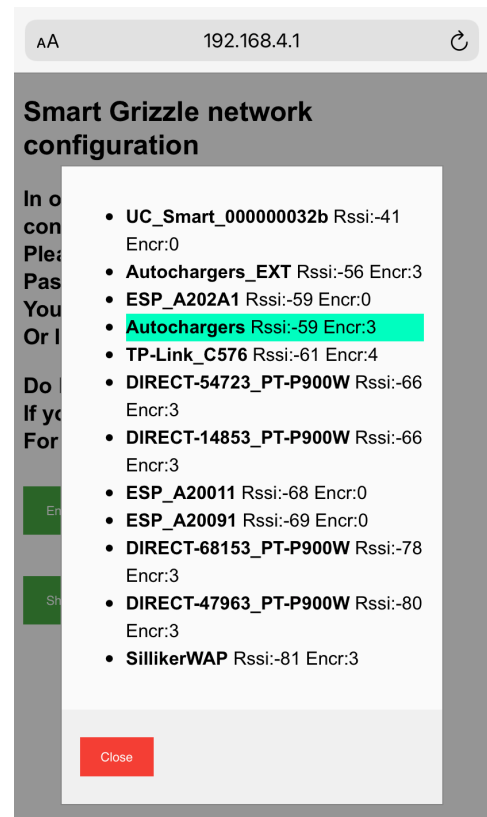


9. Close the Available Networks box and select the Enter Credentials button. The network you selected should be pre-populated in the SSID field.
10. Type the Wi-Fi password into the Password field.
11. Select ChargeLab from the List of portal providers.
12. Enable the **Public Use** checkbox.
13. Select the **Enter Credentials** button.
14. Wait 30 seconds to verify that your device is connected. If the connection is successful the indicator light will alternate between Blue and Cyan.
15. Disconnect your device from UC_Smart_#### and re-connect to your local network.

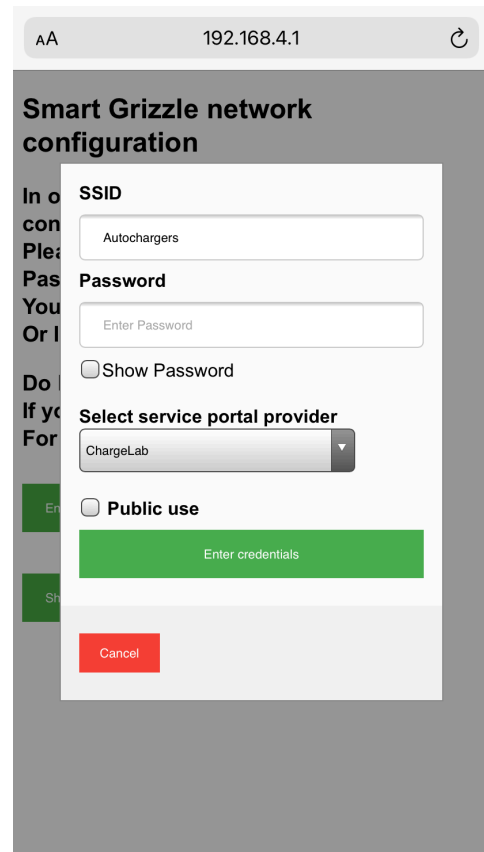

Download the ChargeLab App

Download the ChargeLab app on the Apple App Store or Google Play Store.

Create an account to access Smart Charging features!

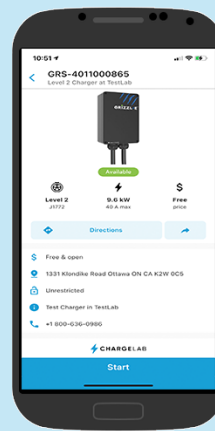

90 Gough Road, Unit 2 Markham, Ontario L3R 5V5 Canada
 +1-833-840-4970
 info@unitedchargers.com
 www.grizzl-e.com

